

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 May 2004 (27.05.2004)


PCT

(10) International Publication Number
WO 2004/044283 A1

- (51) International Patent Classification⁷: **D01D 5/253**, 5/098, D04H 3/16
- (21) International Application Number: **PCT/EP2003/012540**
- (22) International Filing Date:
11 November 2003 (11.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
102 52 414.9 12 November 2002 (12.11.2002) DE
- (71) Applicant (for all designated States except US):
COROVIN GMBH [DE/DE]; Woltorfer Strasse 124,
31224 Peine (DE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HERDA, Eduard** [DE/DE]; Eichendorffstrasse 54 A, 31224 Peine (DE).
- (74) Common Representative: **KEPETS FERBER, Patricia**;
Corovin GmbH, Woltorfer Strasse 124, 31224 Peine (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: NON-ROUND SPINNERET PLATE HOLE

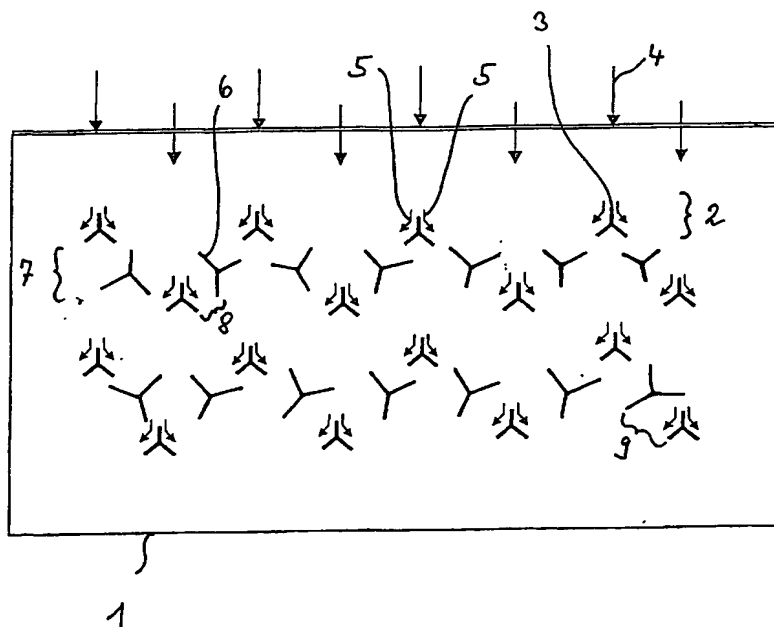

(57) Abstract: The present invention concerns a spinneret plate (1) for manufacturing a nonwoven fabric, having multiple non-round holes, which are similar to trilobal or multiarmed holes (3) in particular, for polymer flow outlet to produce filaments, in which identical holes are positioned in rows offset relative to one another. At least a first row (2) has a positional arrangement of the holes that differs from the positional arrangement of a second row (7) of rows through rotation of the holes.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.